

TEKO rope

Modern LED luminaire for public lighting, designed for suspension on a steel cable.



TECHNICAL SPECIFICATIONS


Light source	LED
Power voltage	AC 220–240 V / 50–60 Hz
Connection method	leading out cable, leading out cable with connector (G)
Ballast part	electronic driver with surge protection L/N-Ground 10 kV
Surge protection	additional surge protection 10 kV (S)
Fuse	fuse 6,3 A (J)
Possibility of regulation	non-dimmable (not labeled), DALI (max. 3 core cable), night dimming (A) preparation for wireless communication NEMA (N), Zhaga (Z) CLO (C)
Constant lumen output	
Optical system	roads (Mxx), roads (Lxx), directional (Pxx), area (Uxx), combined optics (Kxx), BACK Light shades (BL1), FRONT Light shades (FL1)
Light distribution	direct
Colour rendering index	Ra > 70, Ra > 80
Colour temperature	BLUE FREE™ (AMBER) / 2,200 K / 2,700 K / 3,000 K / 4,000 K / 5,000 K / 5 700 K / TW
Service life	> 120,000 hrs. (L90)
Luminaire body	aluminum cast
Colour	RAL 7015/9006*
Surface type	matte
Luminaire cover	tempered glass
Protection class	I, II
Maximum ambient temperature	max. -40 / +55 °C
Ingress protection	IP 66
Impact protection	IK 09, IK 10
EMC	YES
Vibration test	NO
Static load test	NO
Corrosion test – Salty spray	YES (1 500 hours)
Life test	YES
Certification	ENEC, ENEC+ , Zhaga-D4i, IDA Dark Sky Approved
Photobiological safety	RG0
CB mark	YES
RoHS	YES
REACH	YES

Method	on a rope
Recommended height	max. up to 10 m

*other RAL (on request)

Use:

Pedestrian zones, Outdoor areas, Sidewalks, Cycle paths, Square

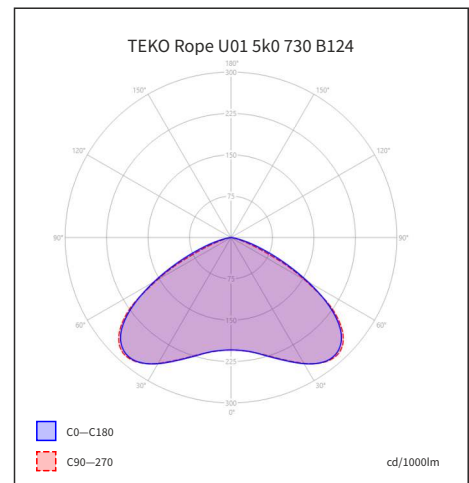

This product contains a light source of energy efficiency class C (730/740), D (AMB/727), E (722).



VARIANTS

VARIANTS (chip 3535)	POWER (W)				LUMINAIRE OUTPUT FLUX (lm)		LUMINAIRE EFFICIENCY (lm/W)	SERVICE LIFE (hrs.)	WEIGHT
	Color temperature (K)								
Catalog name	2200K Ra 70 U500 < 6.5%	2700K Ra 70 U500 < 10.5%	3000K Ra 70 U500 < 15%	4000K Ra 70 U500 < 23%	min	max	Up to	L90B10	kg*
TEKO R(ope) Mxx 1k0	7,8	7,1	6,9	6,5	837	963	148,2	> 100 000	8.7
TEKO R(ope) Mxx 1k5	11,8	10,4	9,9	9,4	1 255	1 445	153,7	> 100 000	8.7
TEKO R(ope) Mxx 2k0	14,5	12,8	12,3	11,7	1 673	1 926	164,6	> 100 000	8.7
TEKO R(ope) Mxx 3k0	22,6	19,5	18,3	17,5	2 510	2 890	165,1	> 100 000	8.7
TEKO R(ope) Mxx 4k0	30,6	27,1	25,1	23,9	3 346	3 853	161,2	> 100 000	8.7
TEKO R(ope) Mxx 5k0	39,6	34,3	32,1	30,6	4 183	4 816	157,4	> 100 000	8.7
TEKO R(ope) Mxx 6k0	42,7	42,6	39,5	37,4	5 020	5 779	154,5	> 100 000	8.7
TEKO R(ope) Mxx 7k0	50,9	44,2	41,6	39,2	5 856	6 742	172,0	> 100 000	8.7
TEKO R(ope) Mxx 8k0	59,5	51,4	48,2	45,4	6 693	7 706	169,7	> 100 000	8.7
TEKO R(ope) Mxx 9k0	68,2**	59	55,4	52,3	7 529	8 669	165,8	> 100 000	8.7
TEKO R(ope) Mxx 10k0	78**	66,6**	62,5**	58,9	8 366	9 632	163,5	> 100 000	8.7
TEKO R(ope) Mxx 12k0	-	83,9**	77,8**	72,9**	10 039	11 558	158,5	> 100 000	8.7

VARIANTS (chip 5050)	POWER (W)					LUMINAIRE OUTPUT FLUX (lm)		LUMINAIRE EFFICIENCY (lm/W)	SERVICE LIFE (hrs.)	WEIGHT
	Color temperature (K)									
Catalog name	BLUE FREE AMBER U500 < 1.7%	2200K Ra 70 U500 < 7%	2700K Ra 70 U500 < 10.6%	3000K Ra 70 U500 < 14%	4000K Ra 70 U500 < 21%	min	max	Up to	L90B10	kg*
TEKO R(ope) Lxx 1k0	7,6	7,6	7,1	6,6	6,4	848	946	147,8	> 100 000	8.7
TEKO R(ope) Lxx 1k5	11,3	10,9	10,3	9,5	9,3	1 271	1 419	152,6	> 100 000	8.7
TEKO R(ope) Lxx 2k0	14,2	13,8	12,6	12	11,4	1 695	1 892	166,0	> 100 000	8.7
TEKO R(ope) Lxx 3k0	21,1	20,7	18,9	17,7	16,9	2 543	2 837	167,9	> 100 000	8.7
TEKO R(ope) Lxx 4k0	28,2	27,7	25,5	23,6	22,6	3 390	3 783	167,4	> 100 000	8.7
TEKO R(ope) Lxx 5k0	35,8	35,1	32,3	29,8	28,2	4 238	4 729	167,7	> 100 000	8.7
TEKO R(ope) Lxx 6k0	39,9	39,1	39,4	36,3	34,3	5 086	5 675	165,5	> 100 000	8.7
TEKO R(ope) Lxx 7k0	46,6	46,2	42,3	39	37,2	5 933	6 621	178,0	> 100 000	8.7
TEKO R(ope) Lxx 8k0	54,1	53,7	48,4	44,7	42,5	6 781	7 566	178,0	> 100 000	8.7
TEKO R(ope) Lxx 9k0	61,9**	60,6	55,4	51,2	48,3	7 628	8 512	176,2	> 100 000	8.7
TEKO R(ope) Lxx 10k0	69,9**	68,5**	62,3**	57,4	54,3	8 476	9 458	174,2	> 100 000	8.7
TEKO R(ope) Lxx 12k0	-	-	76,9**	70,8**	66,7**	10 171	11 350	170,2	> 100 000	8.7


* The weight may vary slightly depending on the luminaire variant.

** Can not be produced under ENEC licence.

Luminaire ambient temperature TQ 25 °C
Initial color consistency: ≤ 5 SDCM
IDA fixture seal of approval relates to ≤ 3 000 K
To meet IDA requirements, the luminaires must be installed horizontally with the road
Optical and electrical parameters tolerance ± 10 %

When using the CLO function, the initial power and luminous flux is 10 % lower than the value shown in the table. LDT curves with CLO function have the letter "C" at the end of their marking.

The term BLUE FREE (AMBER) in lighting technology refers to light with a minimum amount of the blue part of the light spectrum (< 2%).

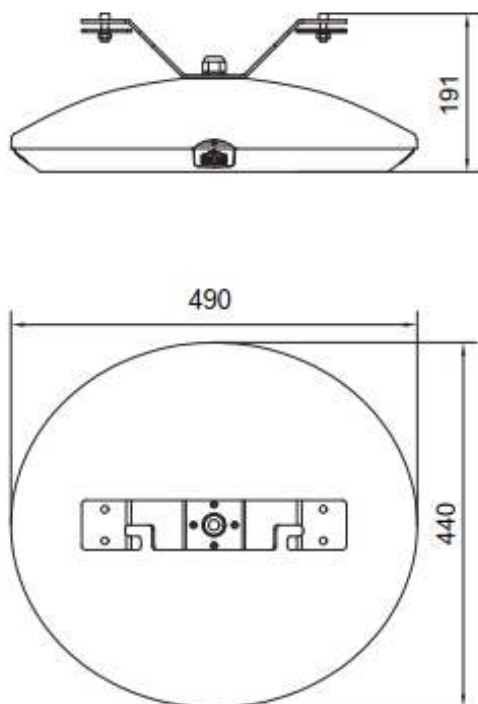

TEKO rope

TEKO Rope TW II M01BL1 8k0 730 B124 43CAZ SJG H3S ENEC

TEKO rope	Name and size of the luminaire	C	constant luminous flux (CLO)
TW	Tunable White Correlated Color Temperature (CCT)	A	auto. dimming
bez značení	Class I luminaire	ZT	ZHAGA Top (top Zhaga connector), D4i driver
II	Class II luminaire	ZB	ZHAGA Bottom (bottom Zhaga connector), D4i driver
G2	luminaire generation	ZN	ZHAGA+NEMA connector (NEMA on top, Zhaga on bottom), D4i driver
M01	Roads	Z2	2× ZHAGA (top and bottom connector), D4i driver
L01	Roads	Z	Zhaga konektor, 4 pin D4i driver
P01	Directional	N	NEMA connector, 7 pin (always only the top connector), DALI driver
U01	Area	S	Additional surge protection 10 kV (S)
ZP1 / ZL1	Pedestrian crossings	J	Fuse
K01	Combined optics	G	Gesis connector
BL1	BACK Light shades (straight)	H	H05(07)RN-F cable (1 mm²)
BL2	BACK Light shades (curved)	C	CYKY cable (1,5 mm²)
FL1	FRONT Light shades (straight)	WO	Without cable
FL2	FRONT Light shades (curved)	2	2 core cable
8k0	Luminous flux marking (source)	3	3 core cable
730	Colour rendering index Ra > 70 Colour temperature 3 000 K	5	5 core cable
B	LED module type	S	Standard – 25 cm length of cable (led out of the luminaire)
1	LED chip type	1	1 meter (length in whole meters)
2	Chip performance BIN	ENEC	Certification
4	Mask type		
12	On/Off driver (neDALI) + 2 pól. svorkovnice		
13	On/Off driver (neDALI) + 3 pól. svorkovnice		
43	DALI driver + 3 pól. svorkovnice		
44	DALI driver + 4 pól. svorkovnice		
45	DALI driver + 5 pól. svorkovnice		
45P	DALI driver + 5 pól. svorkovnice + přítomnost pohybu		
40	DALI driver + odpojovací svorkovnice (standard)		
10	On/Off driver + odpojovací svorkovnice (standard)		
DO	D4i driver (pro Zhaga konektor) + odpojovací svorkovnice (standard)		



lumenlights.eu/teko-rope-en
Update: 17. 9. 2025